

CHAMBERLAIN®

LiftMaster®
PROFESSIONAL

CHAIN GUARD KIT

MODEL K75-34824 FOR SL575/SL585

WARNING


To prevent possible **SERIOUS INJURY** or **DEATH**, disconnect electric power to operator **BEFORE** installing. **ALL** electrical connections **MUST** be made by a qualified individual.

REMOVAL OF EXISTING PARTS

1. Disconnect power to operator.
2. Remove the master link from the drive chain and unwrap chain from idler sprockets and pull out of chain guides.
3. Disconnect radio antenna and cable from guard and set aside for reinstallation.
4. Remove chain guard and discard.

INSTALLATION OF NEW PARTS

1. Install new guard with hardware provided.
2. Reinstall antenna and cable.
3. Reinstall existing chain.
4. Reconnect power to operator.

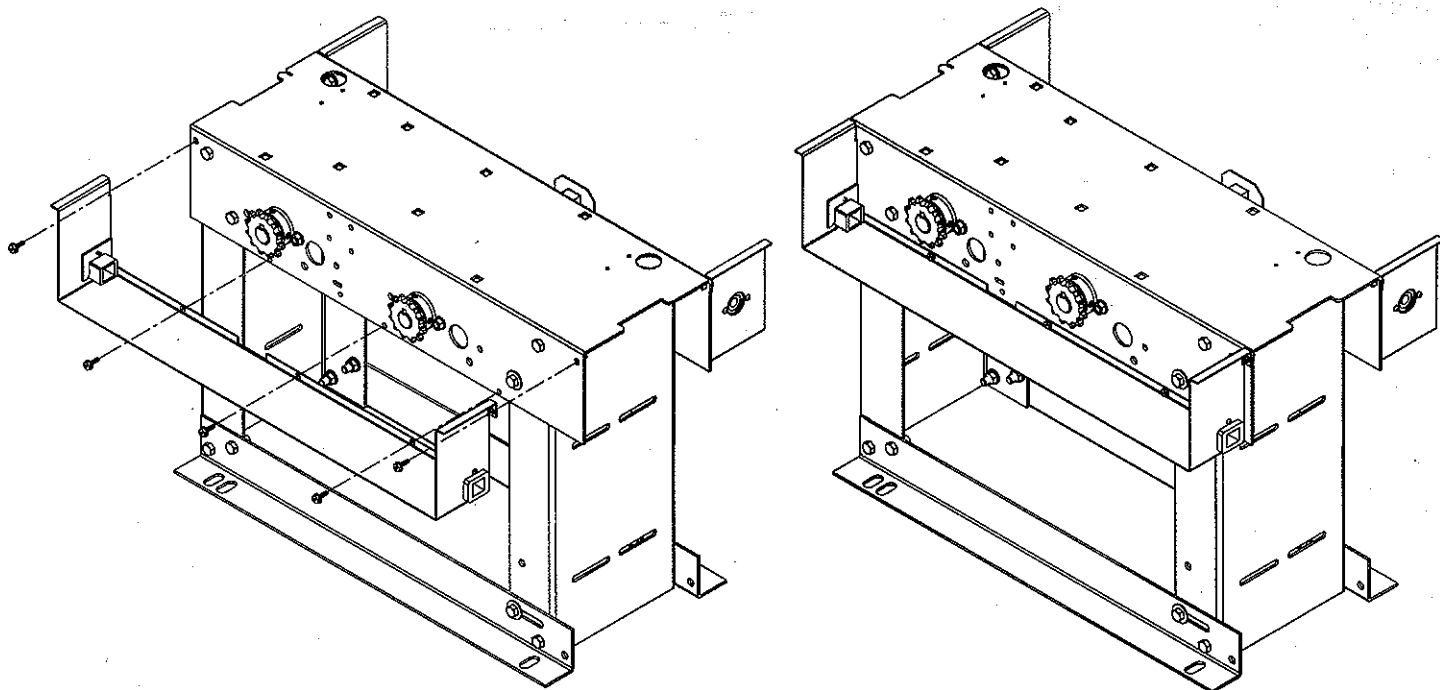

NOTE: Other components not shown for ease of viewing.